

FIG. 1


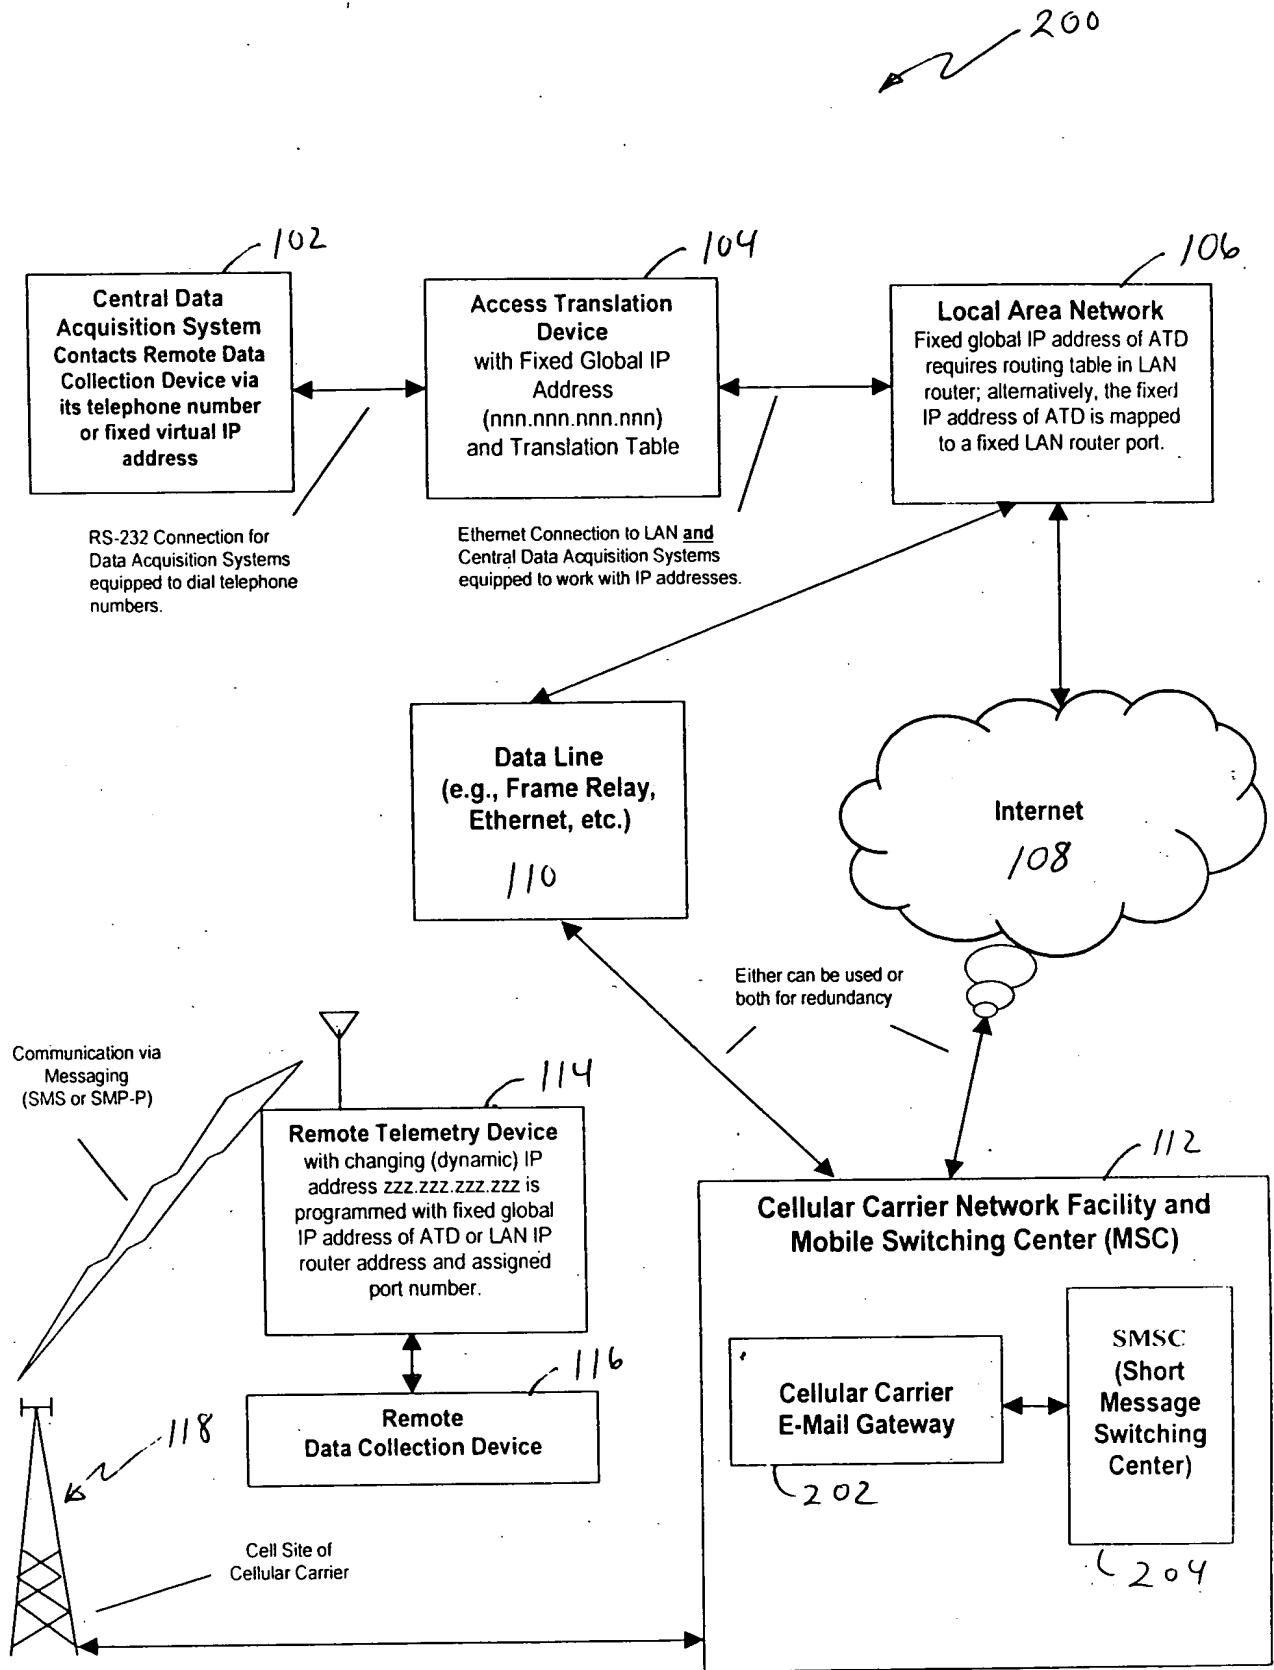


FIG. 2


104

One or each of many serial ports emulate a modem with conventional Hayes AT command set. For illustration, four serial ports are shown here. The data acquisition system at the control location dials telephone numbers or sends fixed IP addresses that the Access Translation Device translates into IP addresses for communications with remote telemetry devices via cellular packet data services.


Ethernet port for (i) access to internet or data line via customer's local area network or (ii) connection to data acquisition systems that can work with fixed IP addresses.

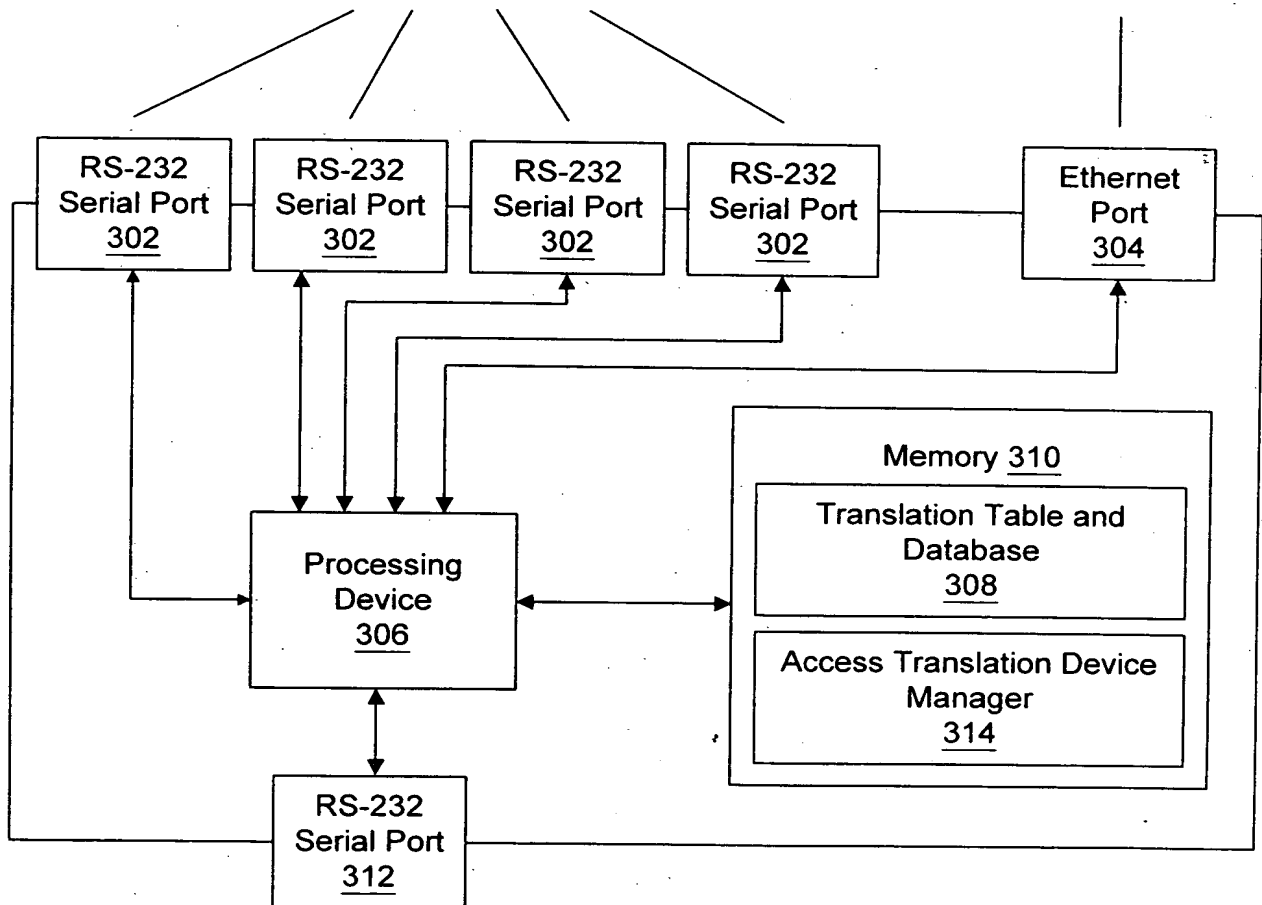

**FIG. 3**

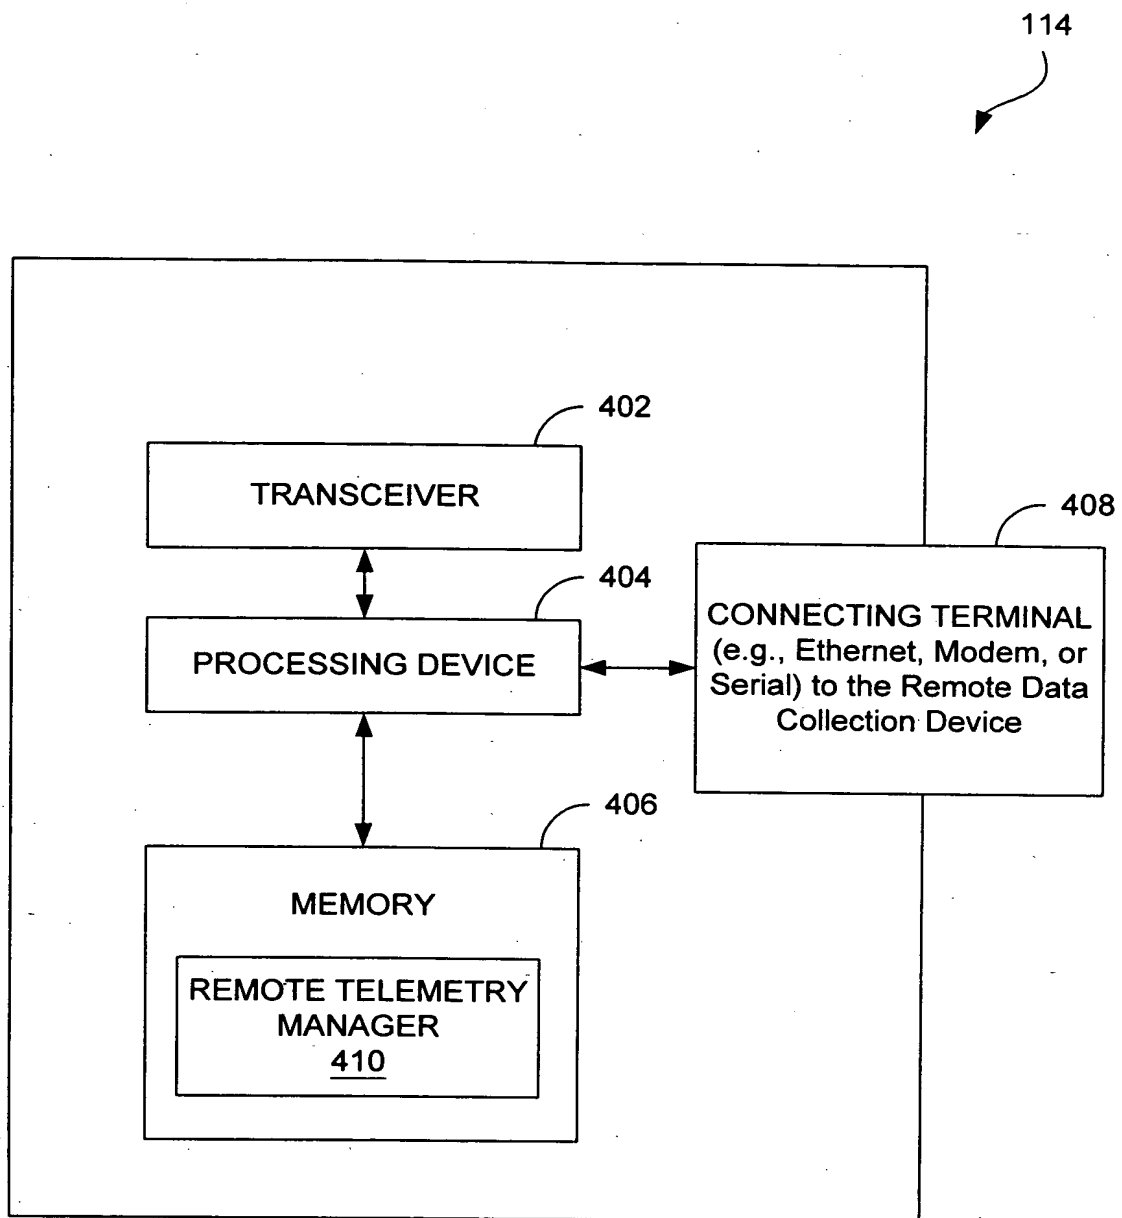


**FIG. 4**

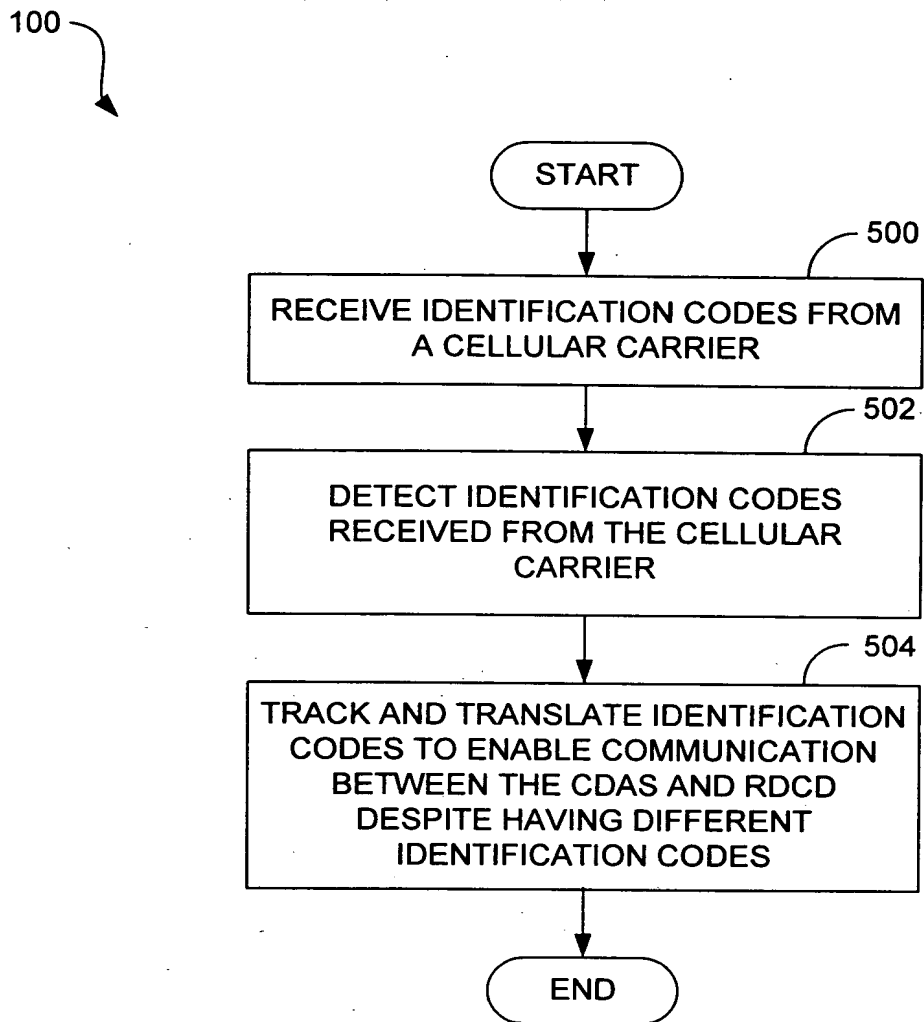


**FIG. 5**

314

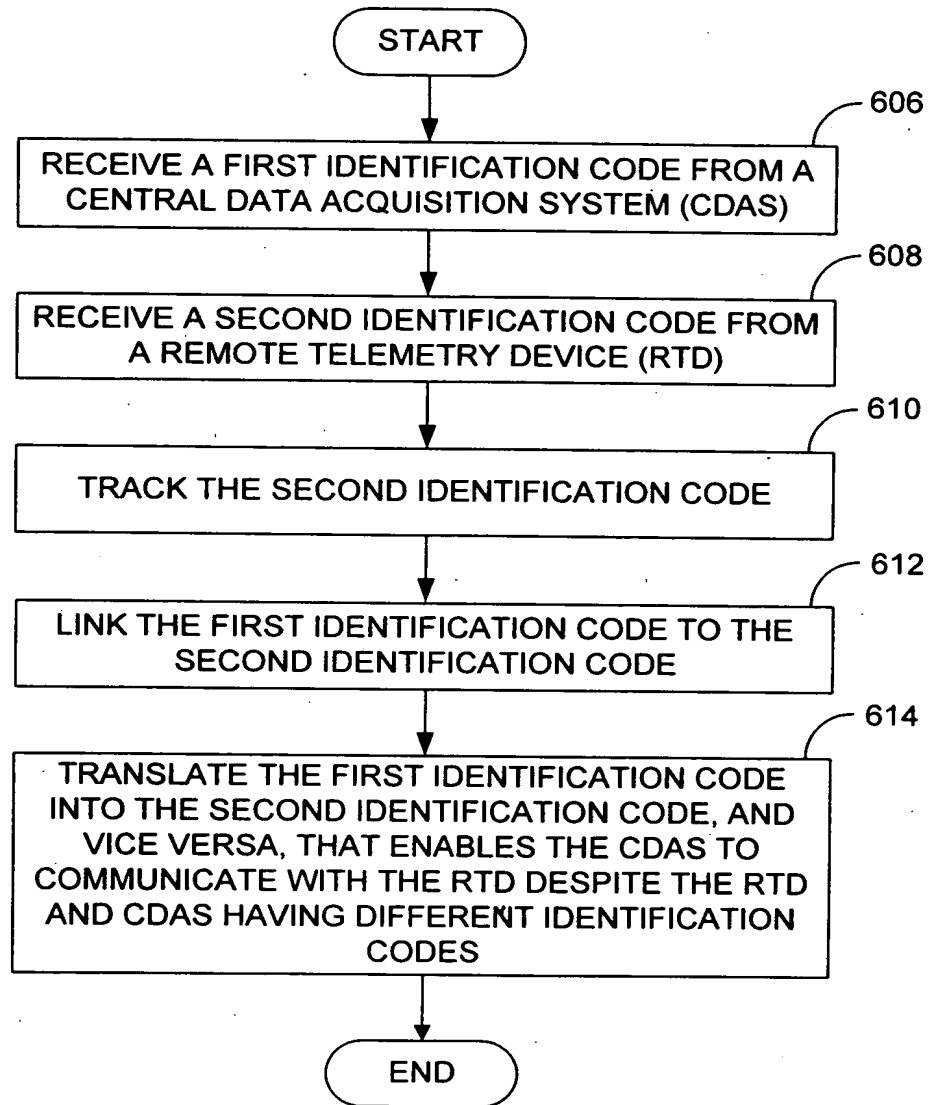

**FIG. 6**

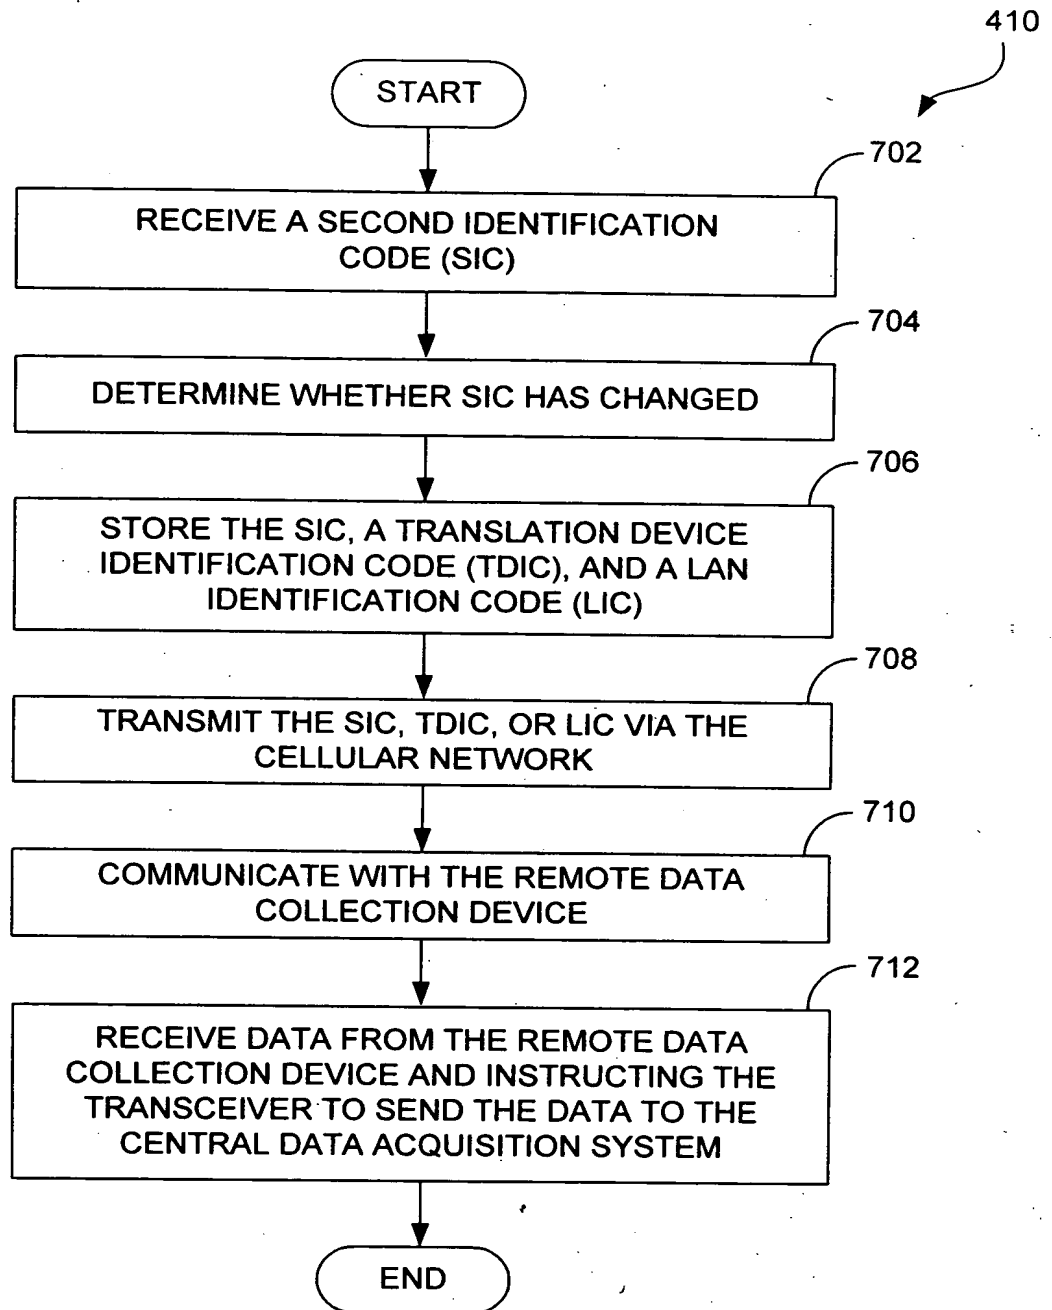

**FIG. 7**